



Kingston, WA

Port Gamble S'Klallam Tribe Heronswood Garden Water Main Extension

Project Number: 10182300030

Addendum No. 1

February 19, 2024

ATTENTION: All Bidders and Plan holders:

This addendum supersedes items of the original Contract Documents, effective on the date specified above. All other conditions remain unchanged. The following changes, modifications, corrections, additions or clarifications shall apply to the contract documents and shall be made a part of and subject to all of the requirements thereof as if originally specified or shown. It is the responsibility of the bidder to review the list of attachments to ensure that the addendum is full and complete. This Addendum modifies the original Bid Documents for the above Project. Acknowledge receipt of this addendum, totaling THREE (3) pages, by inserting addendum number and date in the space provided on the BID FORM. Failure to do so shall be grounds for disqualification of the Bidder.

Addendum Items:

1. Project Manual

The following revisions within the Project Manual are provided to be incorporated into bid proposals and the subsequent construction.

2. Construction Drawings

The following revisions within the Project Manual are provided to be incorporated into bid proposals and the subsequent construction.

Sheet 15 of 20 Water Details & Notes

Add the attached Fig 7-1 Standard Trench and Pavement Restoration

Surface restoration and backfill required at roadway crossings with gravel borrow, crushed surfacing top course, or CDF meeting the requirements of WSDOT Standard Specifications and mechanically compacted to 95 percent of maximum density (modified proctor) in accordance with WSDOT Standard Specifications. Including export and disposal of unsuitable materials.

Requirements for utility trenching will be per Kitsap County Road Standards Section 7.5.3.2.

Paving for all pipe restoration areas crossing Hansville Rd and 288th Rd NE shall be a minimum of 3-inch compacted depth of HMA, 2-inch compacted depth of CSTC, and 6-inch compacted depth of CSBC. Pavement shall be done per **Kitsap County Road Standard Section 3.6.**

3. Miscellaneous Discussion/Clarification Items:

A. Sales Tax:

Sales Tax shall not be included within the bid amount.

Sovereign Immunity:

Port Gamble S’Klallam Tribe will waive sovereign immunity during the contracting phase.

B. Time of work:


Work will occur during the **DAY** on all portions of the project, except for when working at the intersection of Hansville RD NE and NE 288th St. Work within the intersection shall occur at night expect as allowed by the Engineer.

Paving at the connection at the intersection of Hansville Rd and NE 288th St may occur during daytime working hours as approved the Engineer and Kitsap County.

C. ROW Permit:

The contractor shall be required to obtain the ROW Permit from Kitsap County.

Figure 7-1: Standard Detail - Standard Trench and Pavement Restoration

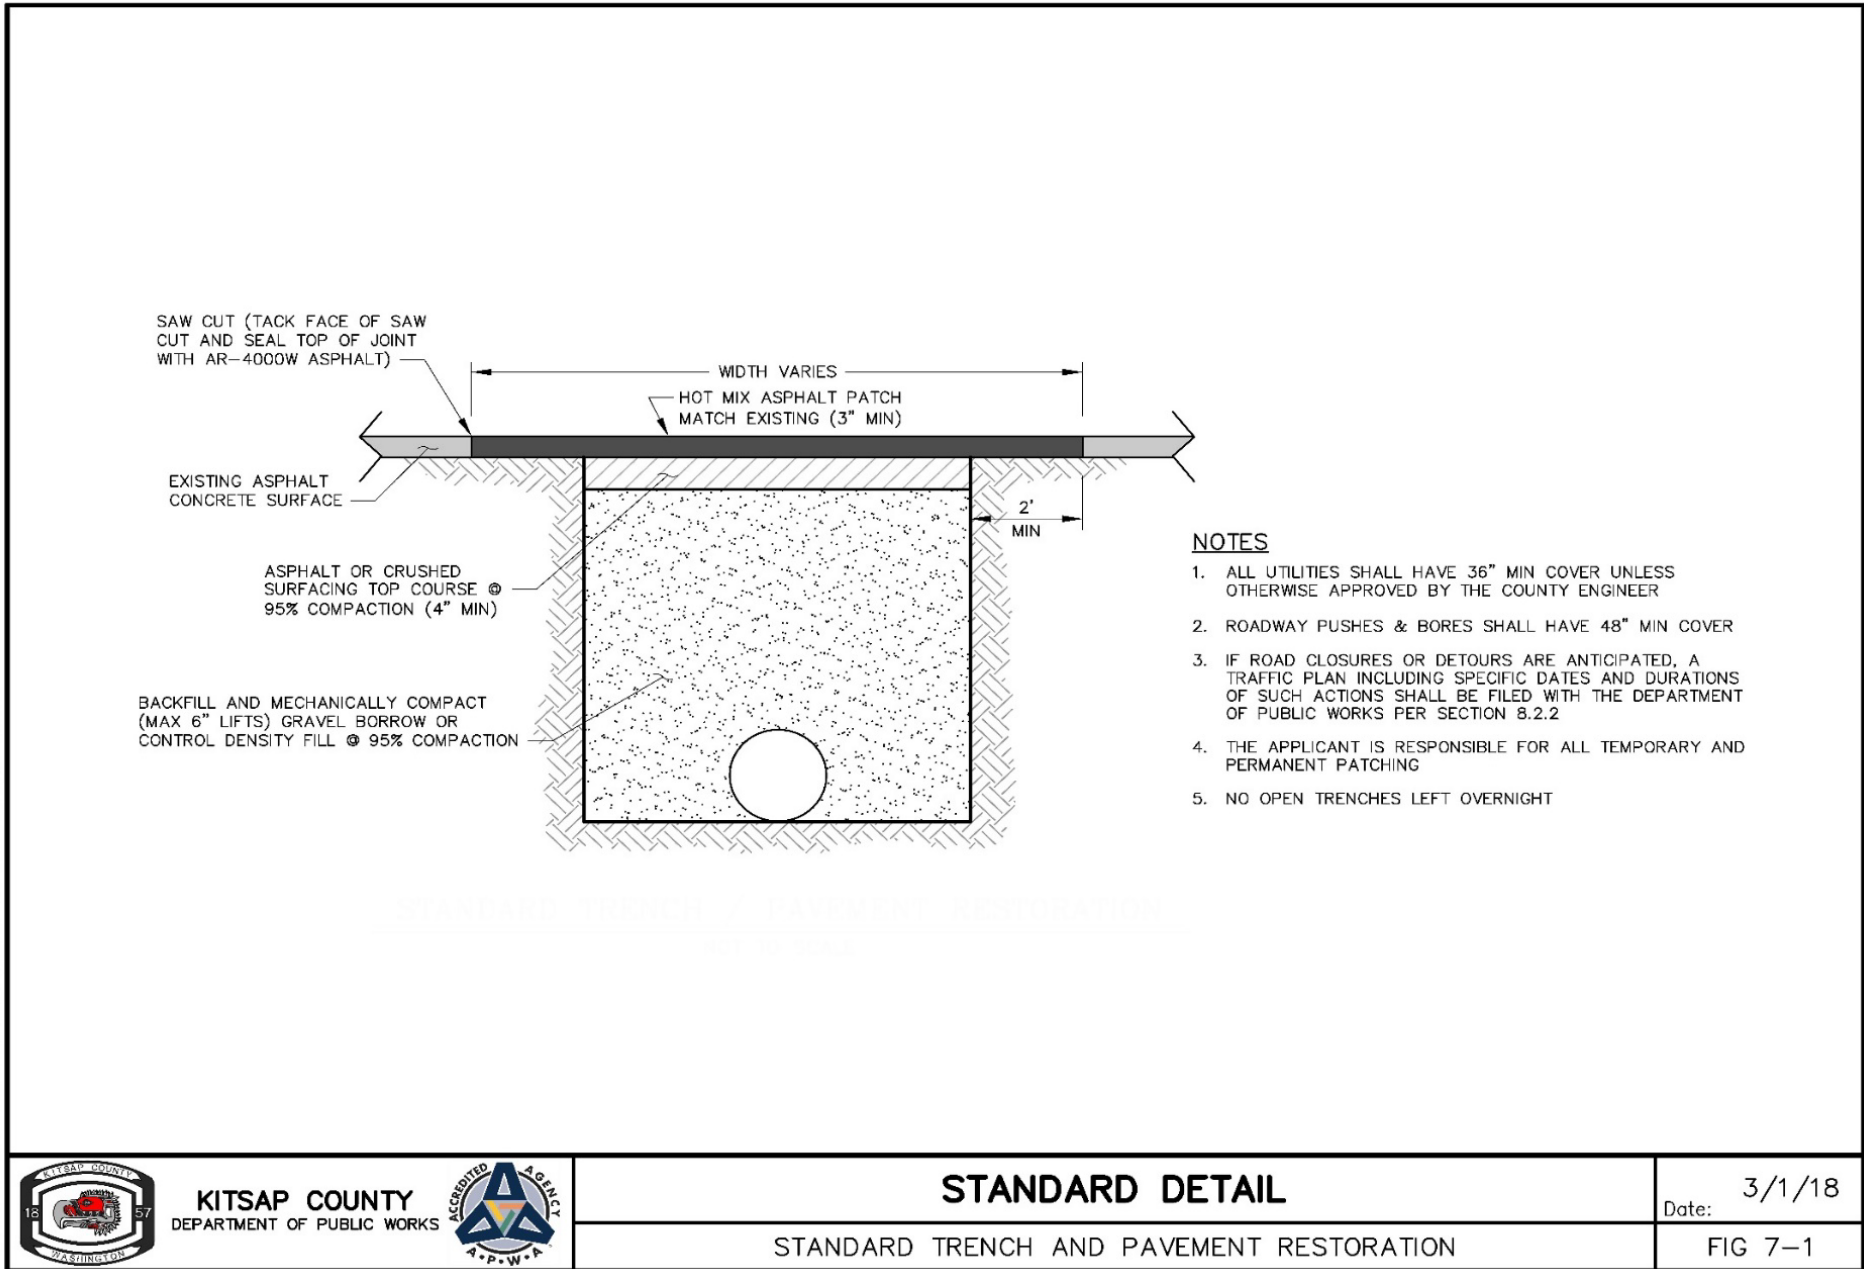

Prepared for:
Port Gamble S'Klallam Tribe
Kingston, WA 98346

Prepared by:
KPF Consulting Engineers
612 Woodland Square Loop SE, Suite 100
Lacey, WA 98503
(360) 292-7230
(360) 292-7231 FAX

End of Addendum No. 1

This Addendum is being distributed to all listed plan holders. Recipients are responsible for dissemination of this information to all affected sub-bidders, suppliers, etc.